





CSVF 500 SPECIFICATIONS

Model Number	CSVF-500-0007*	CSVF-500-0010*	CSVF-500-0015*
Capacity Range (pF)	12-500	12-500	12-500
Voltage (kV) Peak			
Test	7.5	10	15
Working	4.5	6.0	9.0
Current Amps (RMS) Max.	80	90	100
Type	Ceramic	Ceramic	Ceramic
Nominal Dimensions			
Length (in. / mm)	7.88 / 200.15	7.88 / 200.15	7.88 / 200.15
Diameter (in. / mm)	3.50 / 88.90	3.50 / 88.90	3.50 / 88.90
Torque (in Lbs.) Max.	2.3	2.3	2.3
Direct Pull (Lbs.) Max.	50	50	50
Weight (Nominal)	3 lb.	3 lb.	3 lb.
NOTES: <i>Mounting:</i> Use flange FM2S on fixed end. Flange FM2 on variable end. * CSVFN (non-magnetic version) available.			

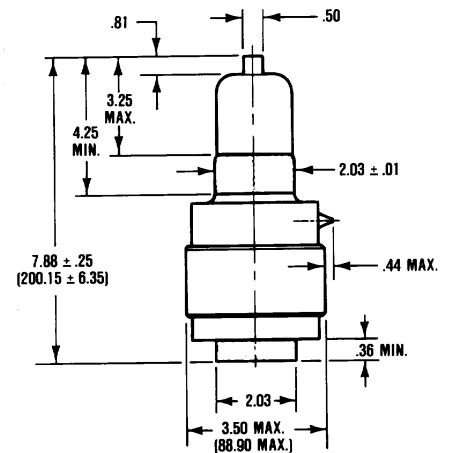

CAPACITY vs TURNS
Typical Data

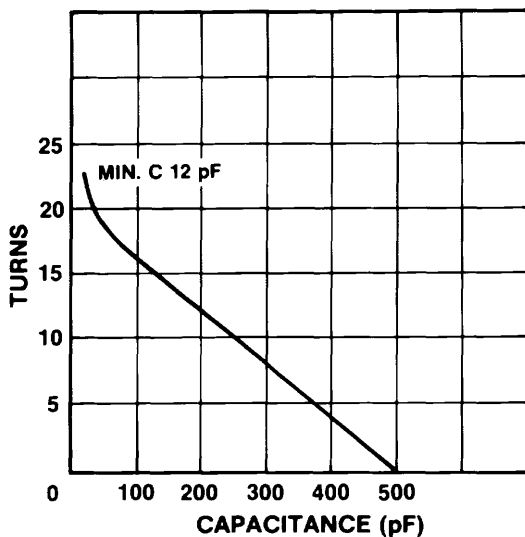

CONTINUOUS RMS AMPERES vs FREQUENCY
(at 9kV PEAK WORKING VOLTAGE)

